

Fig. 1

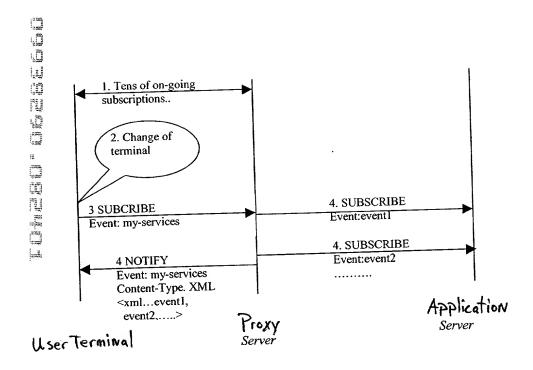
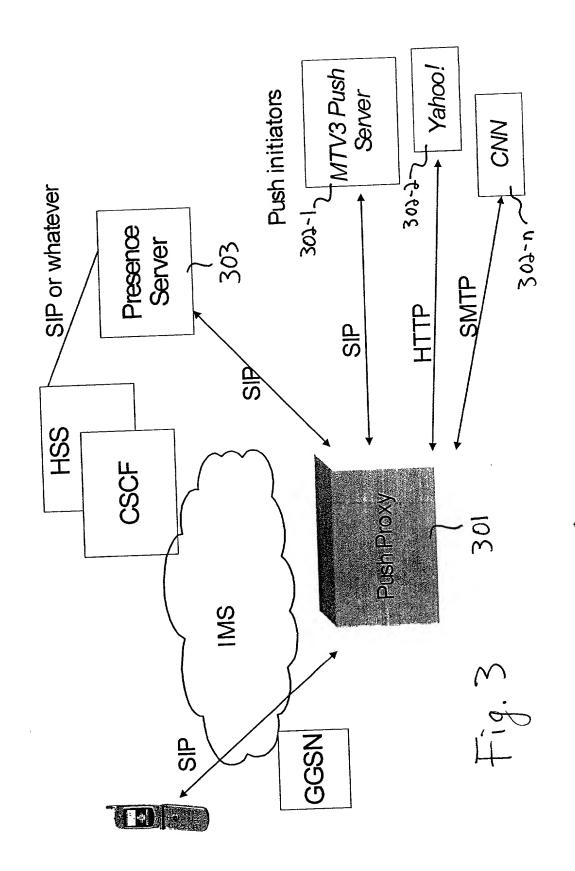


Fig. 2



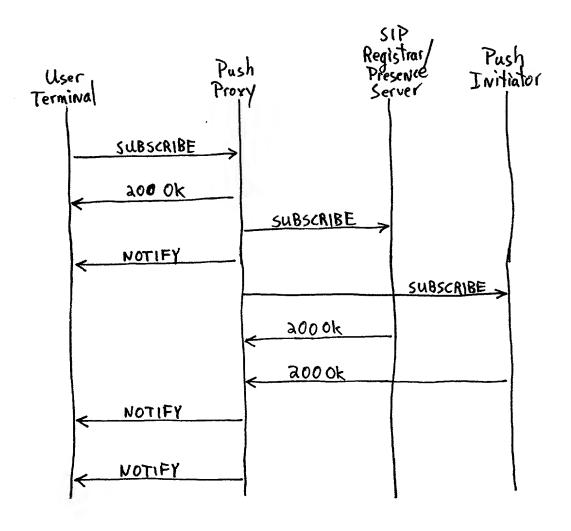



Fig. 4


SIP SUBSCRIBE


Event: Push
From: sip:pk@mci.com
Content: XML
<XML allow_ads=no>

202 Accepted / 200 ok

下海,5

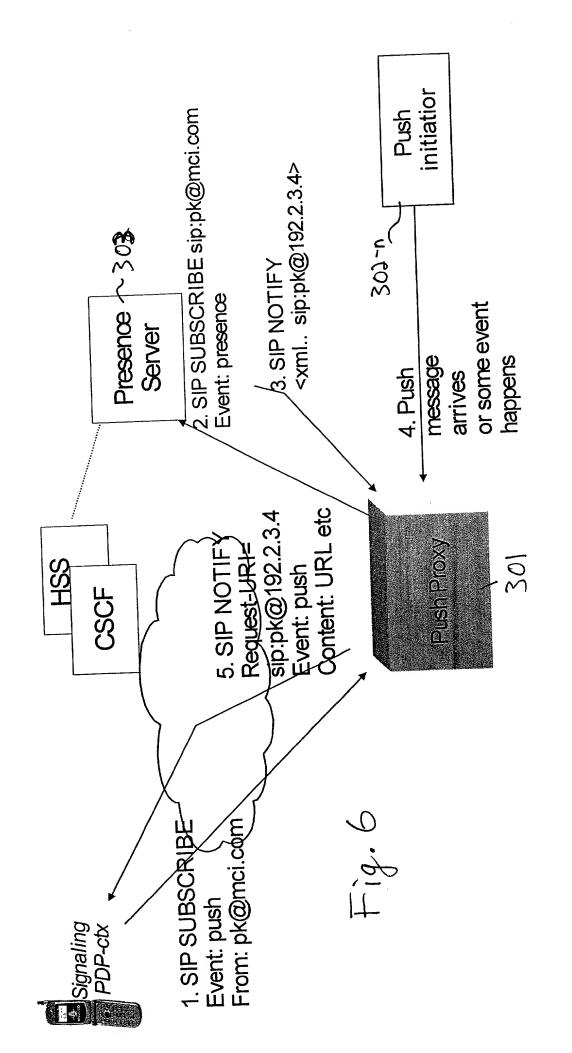

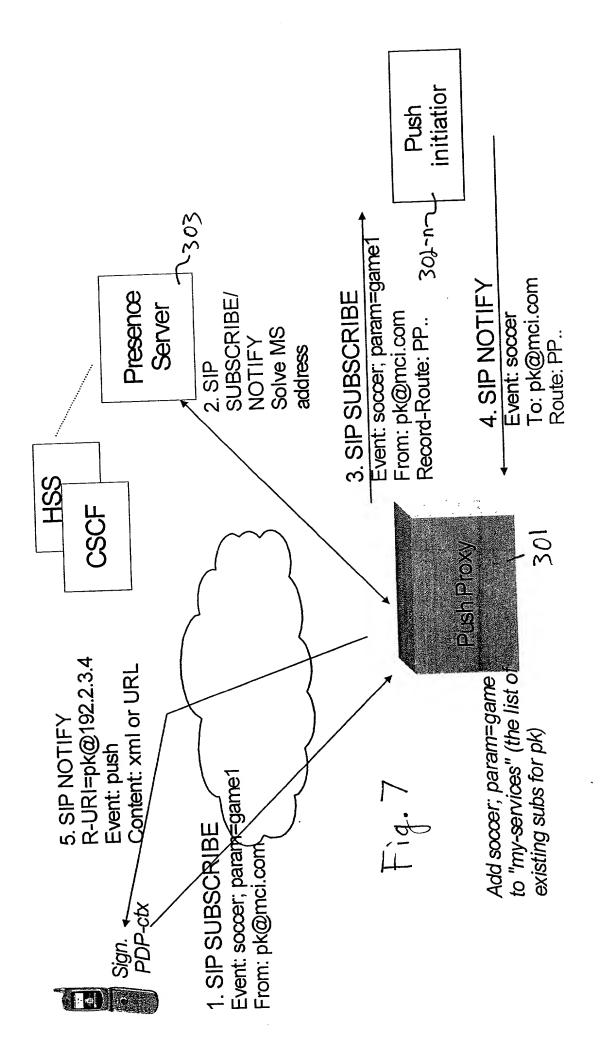

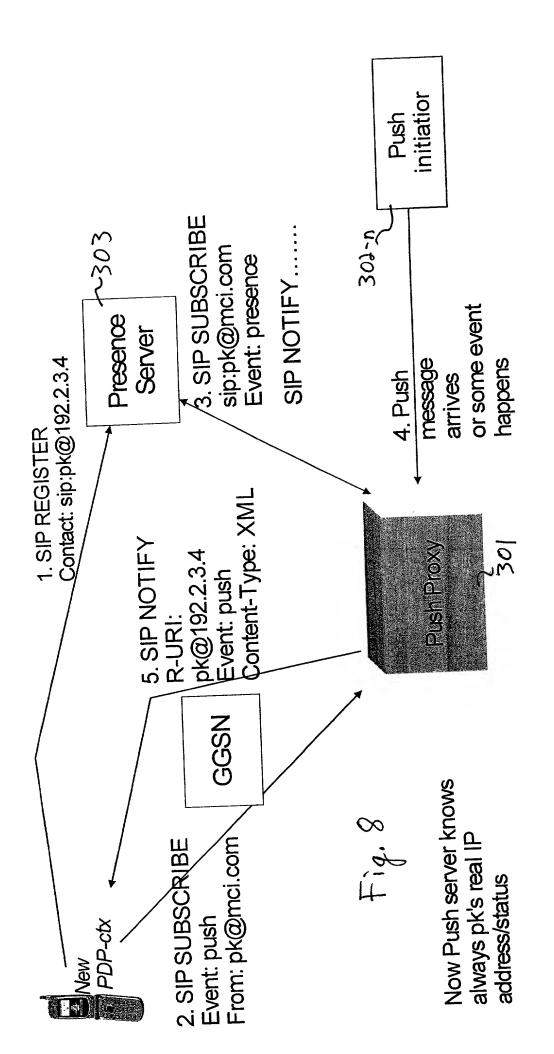

301 Push Proxy

Fig. 9

subscriptions after they have been created by MT SIP or HTTP to manage

Subscription/push database:

R-URI=sip:soccer.com User: sip:john@mci.com = sip:john@192.99.99.77

soccennodate: param=dame292___ Events:

User: sip:petri@mci.com = sip:pk@192.22.33.44; transport=UDP Push initiator:

soccerupdate; param=chelseagame19 soccerupdate; param=manugame25 Events:

com.nokia.clubnokia; param=foo2 push1

R-URI=sip:club.nokia.com R-URI=sip:robot@chess.fi R-URI=sip:manu.co.uk R-URI=sip:soccer.com R-URI=localhost:50

TAN C